SOLAR MOTION SENSOR LIGHT INSTRUCTIONS

PRODUCT PARAMETERS / INSTRUCTIONS

SOLAR PANEL	5V 300MA	SENSOR RANGE	0-6M
LED	4 high power lamp beads	SENSOR ANGLE	120°
LED COLOR	White Warm white	CHARGING TIME	4-6H
BATTERY	Lithium battery 3.7V 1200MAH	MATERIAL	PC
		OUTPUT POWER	MAX 4W
FUNCTION	3 modes	LUMINOUS FLUX	MAX 500LM
ILLUMINATED AREA	50-80m²	PROTECTIVE FUNCTION	IP65

Press button to start the machine
1. Mode 1: when someone comes
it starts highlight.It will dim after someone
leaving for 13 seconds
2.Mode 2: when someone comes it starts
highlight.It will trun off after someone
leaving for 13 seconds
3. Mode 3: Always light 3 hours
then it will switch to Mode 2

INSTALLATION INSTRUCTIONS

1. Use marking pen at the position to be installed Make a mark

2. Punch holes at marked positions

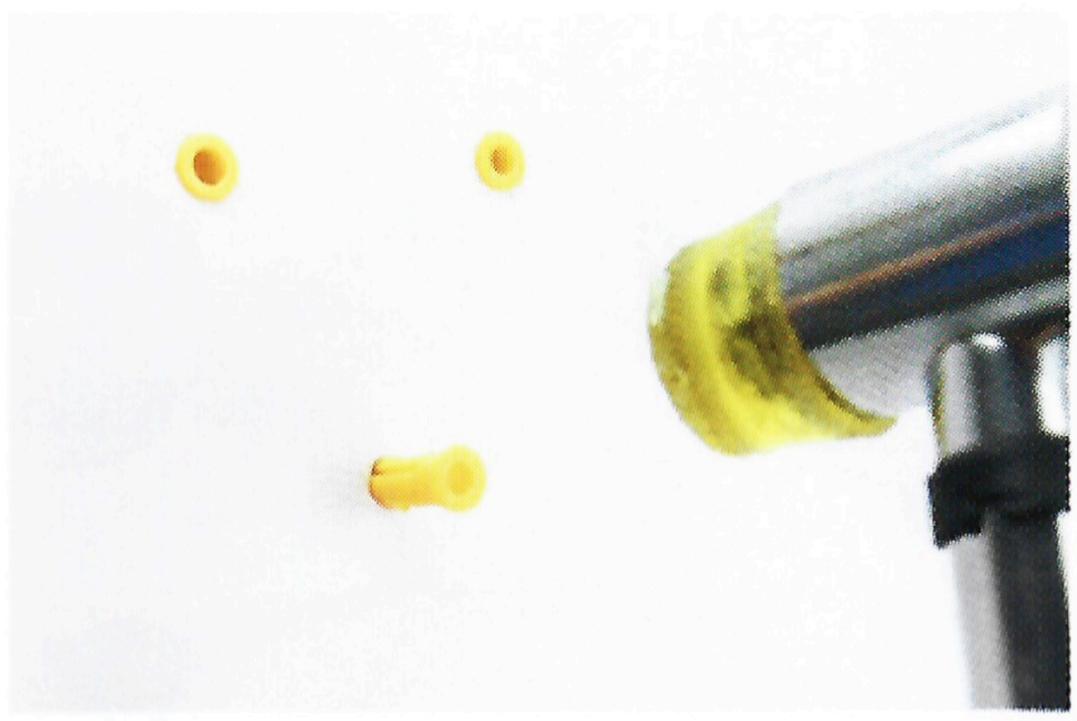

3. Knock in the expansion pipe

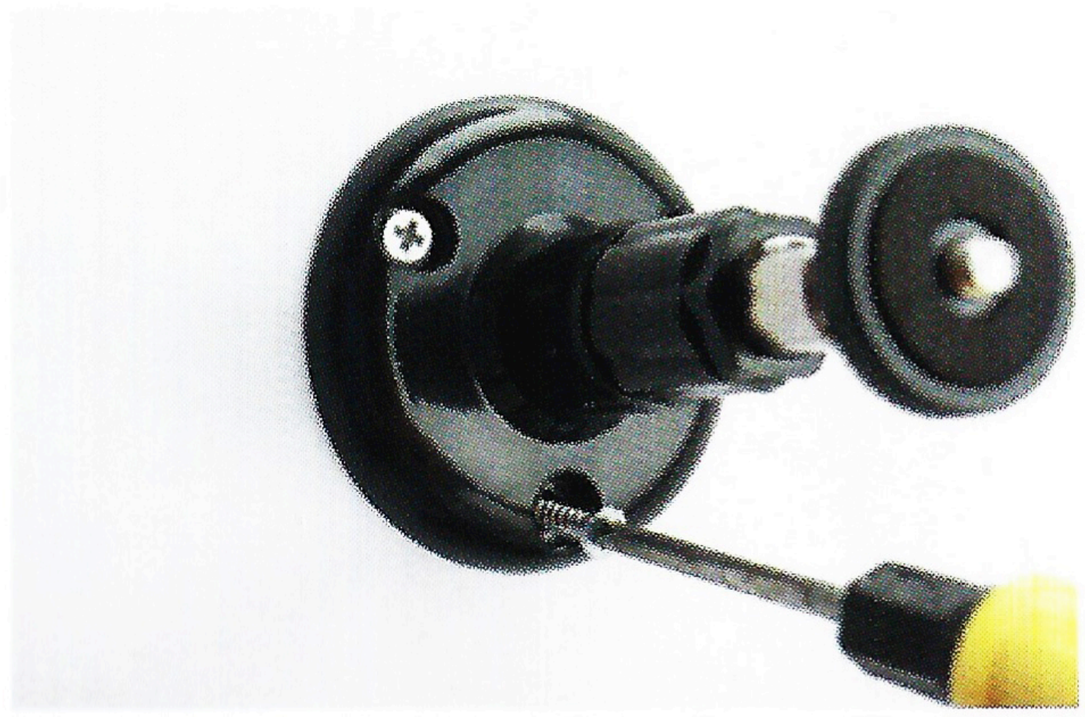

4. Tighten the screws and mount the base on the wall

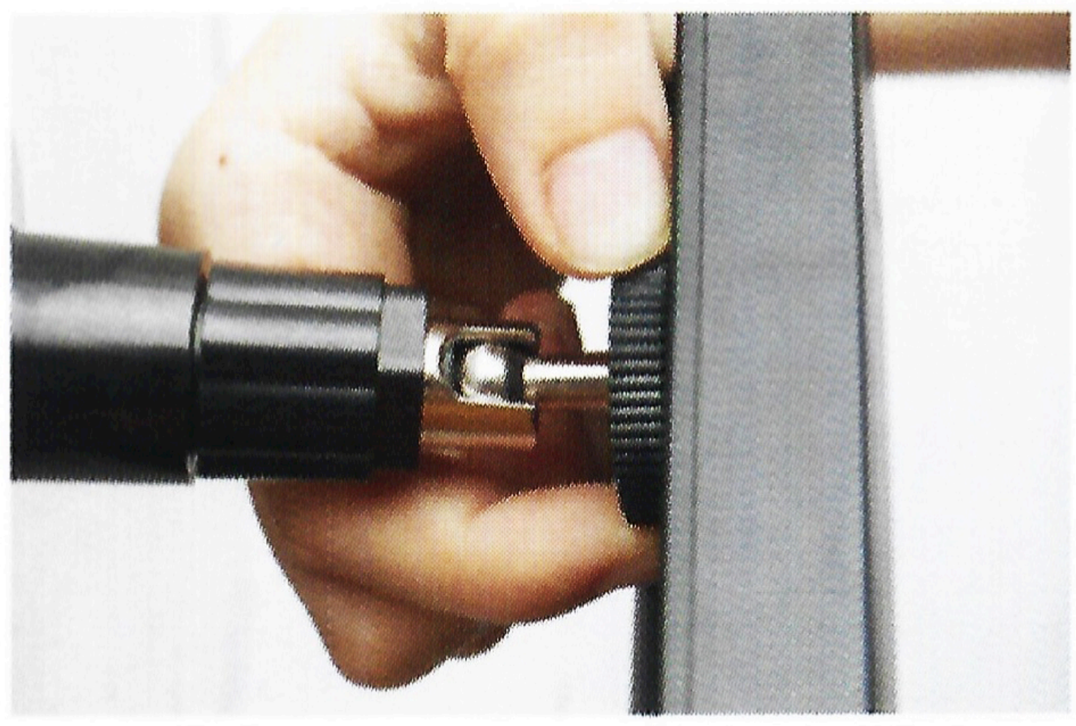

5. Screw the lamp cap in clockwise direction andTighten plastic nuts

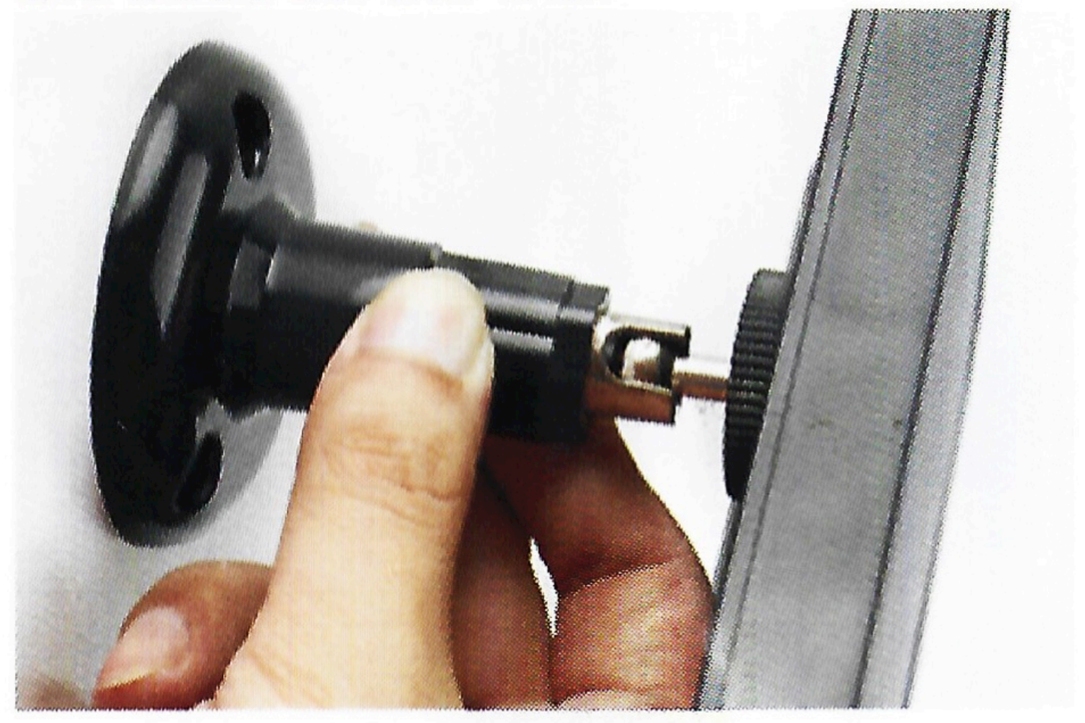

6. Adjust the irradiation angle through the direction adjustment knob Loosen the adjusting angle and tighten the fixing angle

7.COMPLETE

ATTENTION

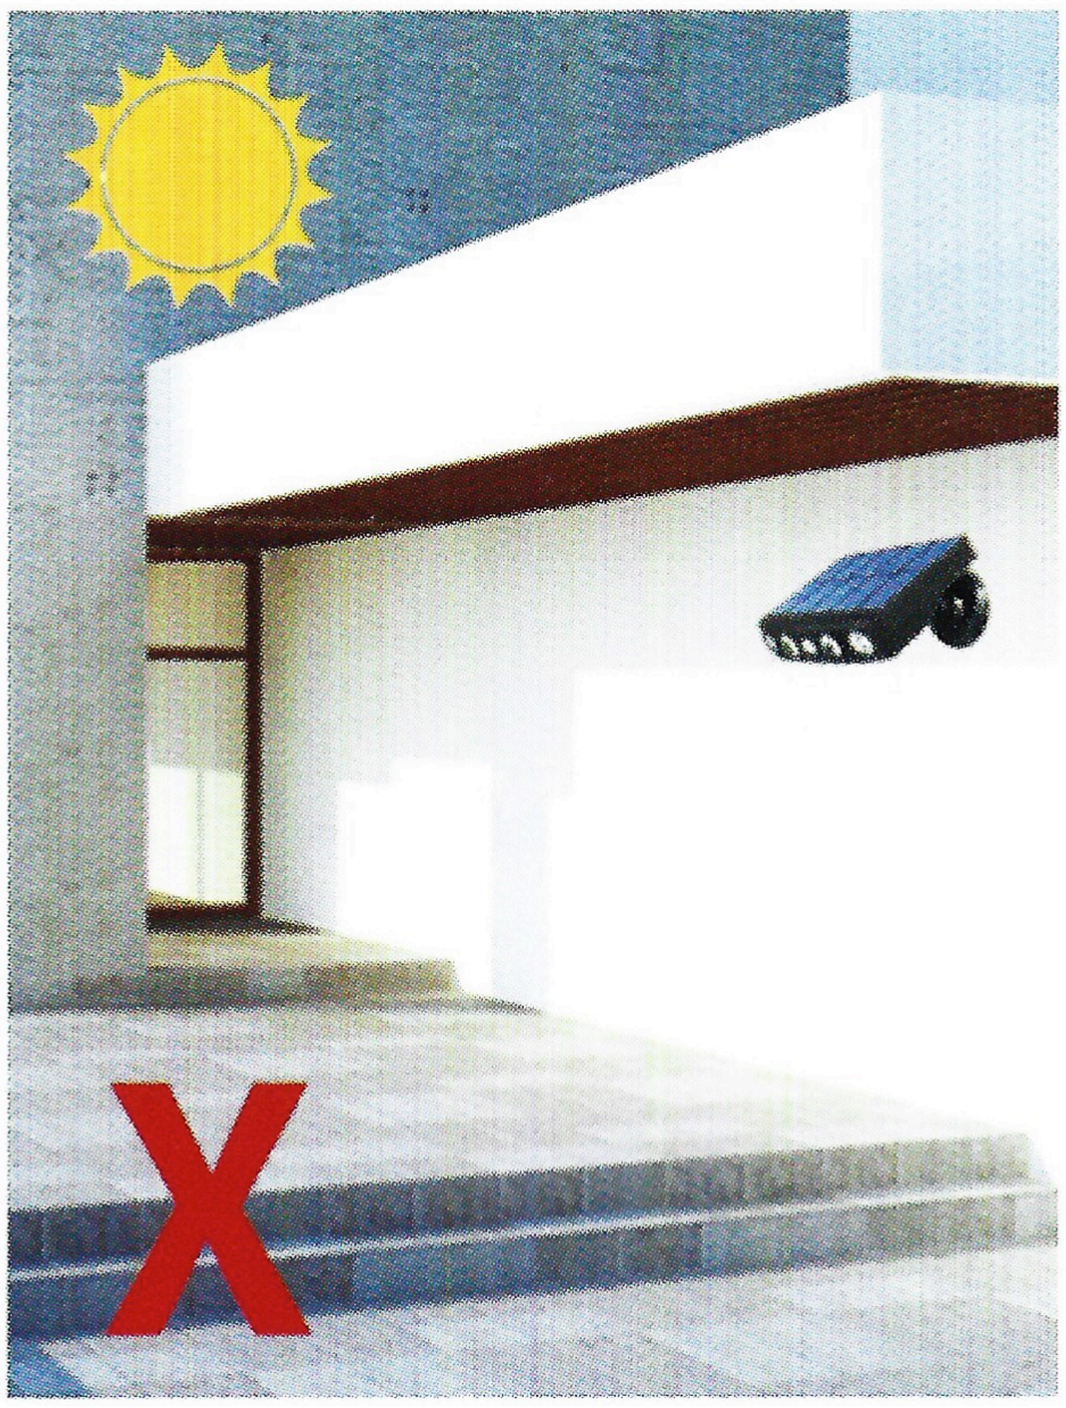

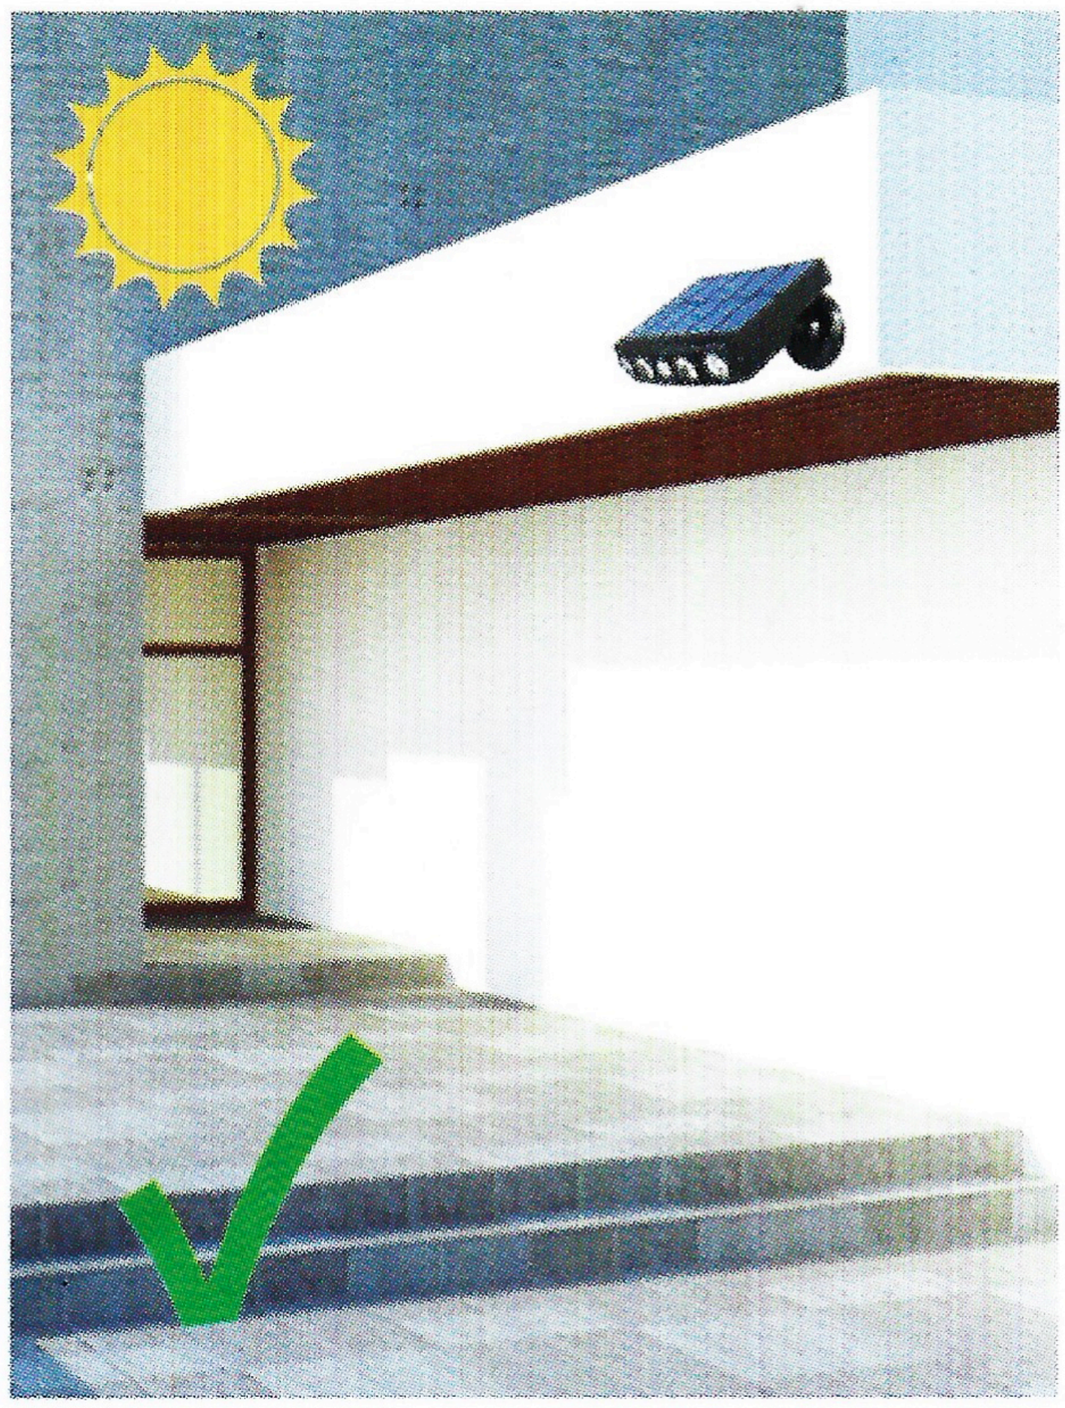

Charging during the day,please make sure nothing cover the solar panel,Whether or not it will affect the charging effect of solar energy and affect the lighting time and brightness

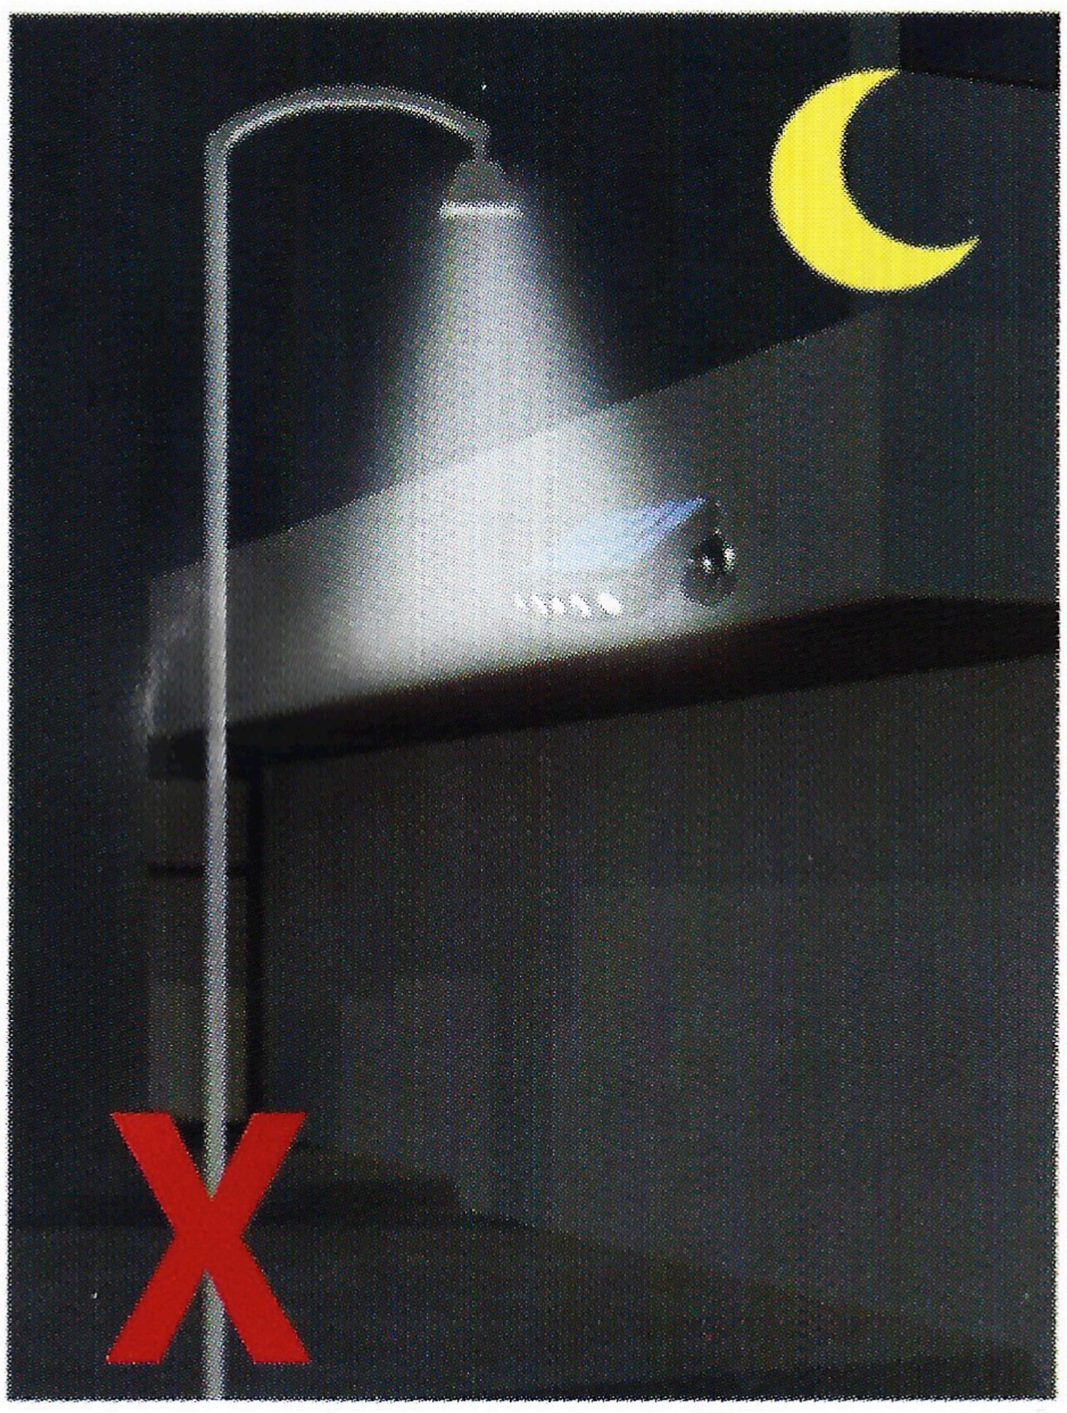

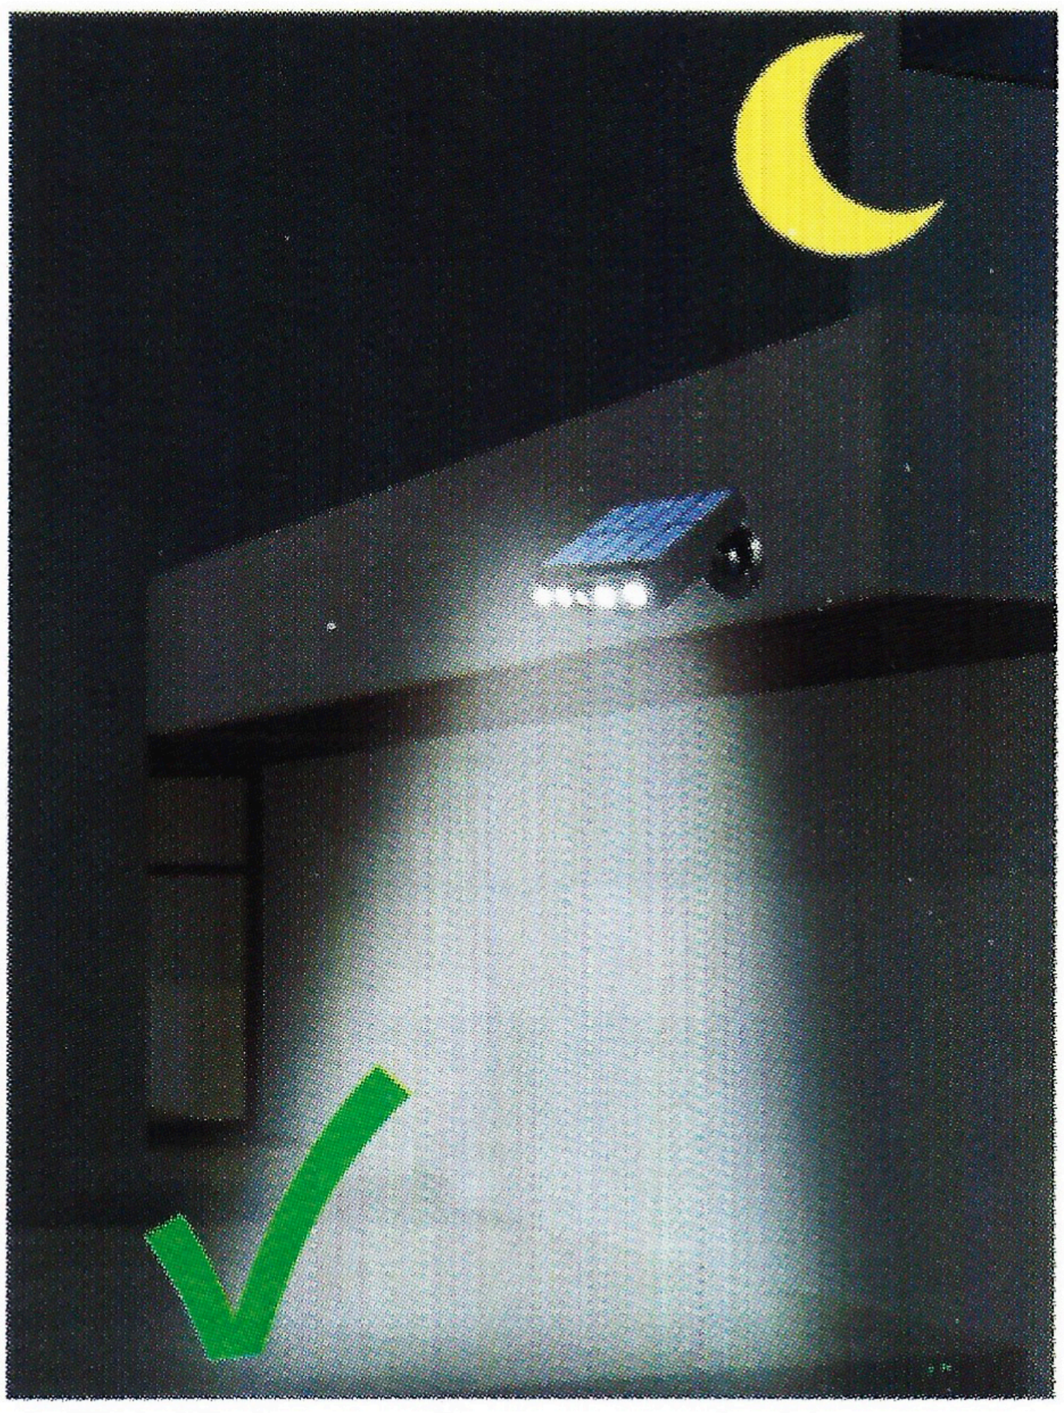

Make sure there is no strong light on the solar panel after dark
Whether or not it will enter charging mode,and thelight will not work

仿监控太阳能感应灯
使用说明书

产品参数/使用说明

太阳能板	5V 300MA	感应距离	0-6米
LED规格	4颗大功率灯珠	感应角度	120°
LED颜色	白光 暖光	充电时长	4-6小时
电　池	锂电池 3.7V 1200MAH	外壳材质	ABS
		输出功率	最大4瓦
模式调节	3种亮灯模式	光通量	最大500流明
照明范围	50-80m²	防护功能	户外 防水 防晒 防雷

1.按一下，开机默认进入模式1(灯闪一下)

模式1:人来高亮，人走13秒后微亮

2.再按一下，进入模式2(灯闪两下)

模式2:人来高亮，人走13秒后灭灯

3.再按一下，进入模式3(灯闪三下)

模式3:长亮3小时后切换为模式2

4.再按一下，关机

安装说明

1.用记号笔在需要安装的位置做标记

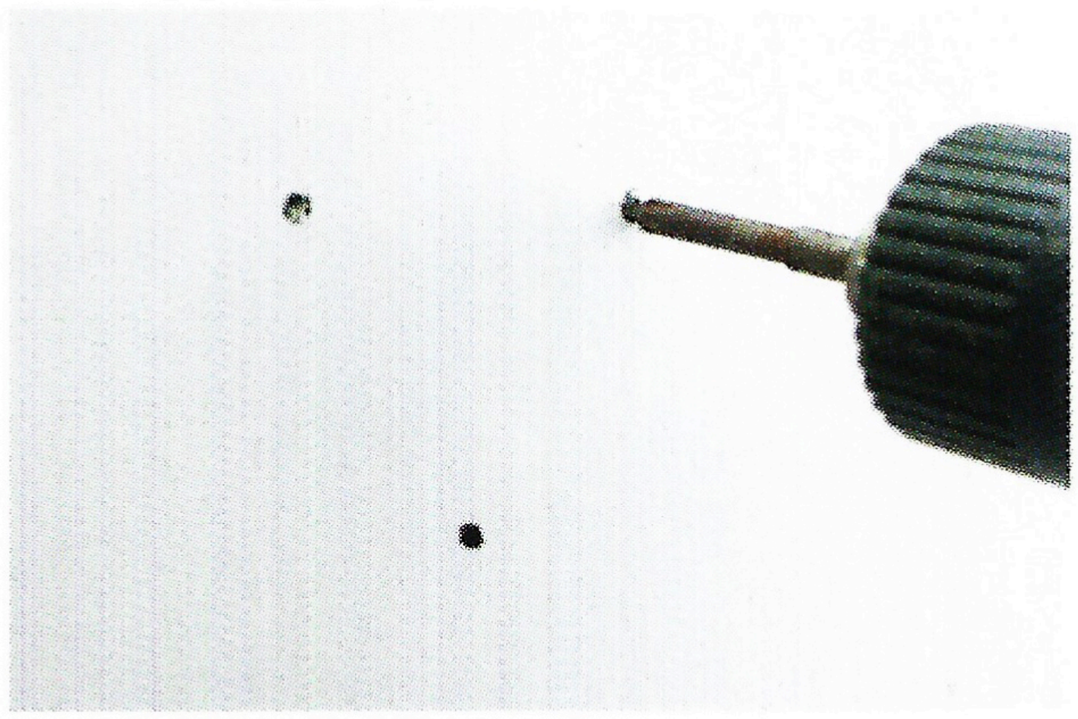

2.在标记位置打孔

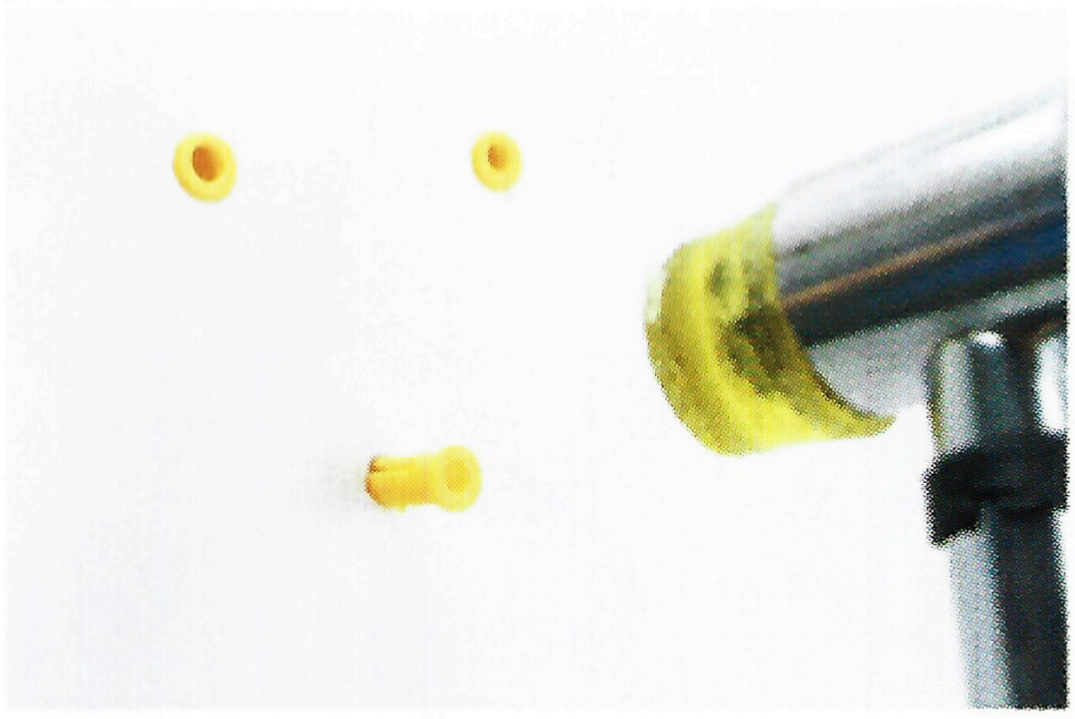

3.敲入膨胀管

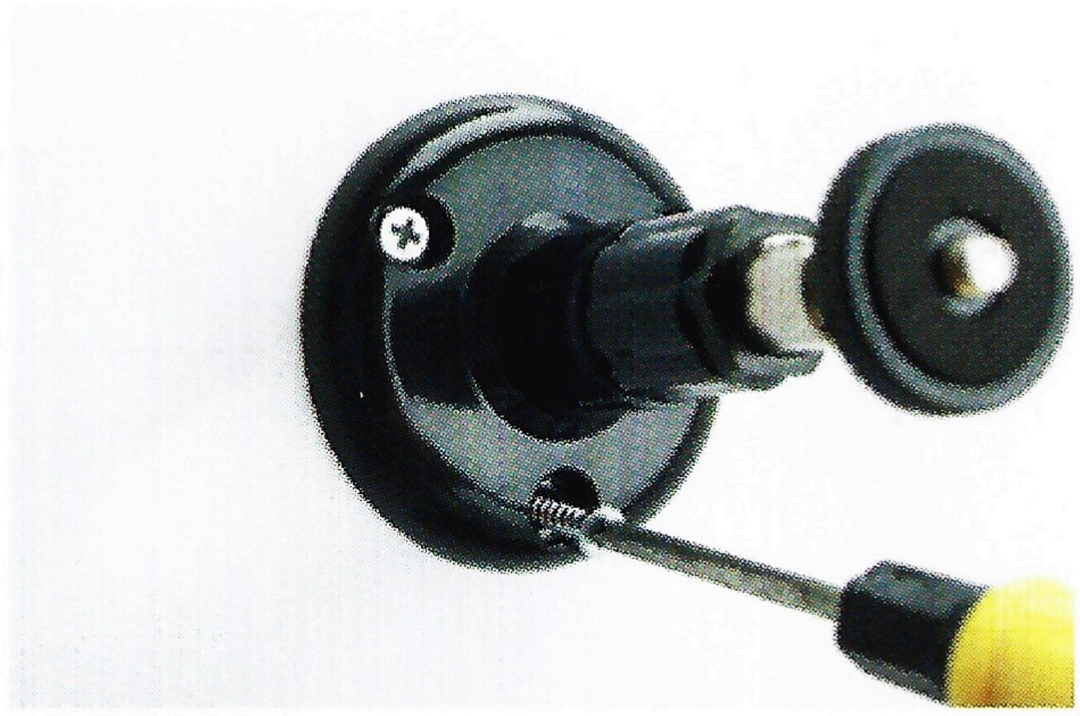

4.拧紧螺丝，墙上装好底座

5.将灯头按顺时针方向旋入并拧紧塑料螺帽

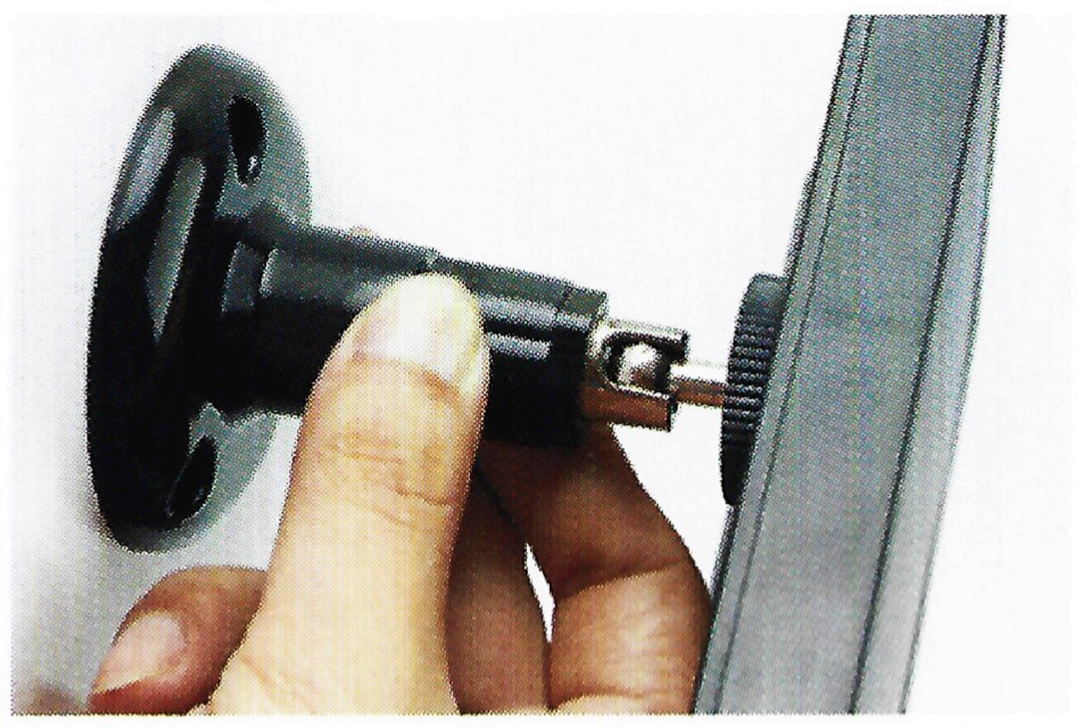

6.通过方向调节旋钮调节照射角度拧松调整角度，拧紧固定角度

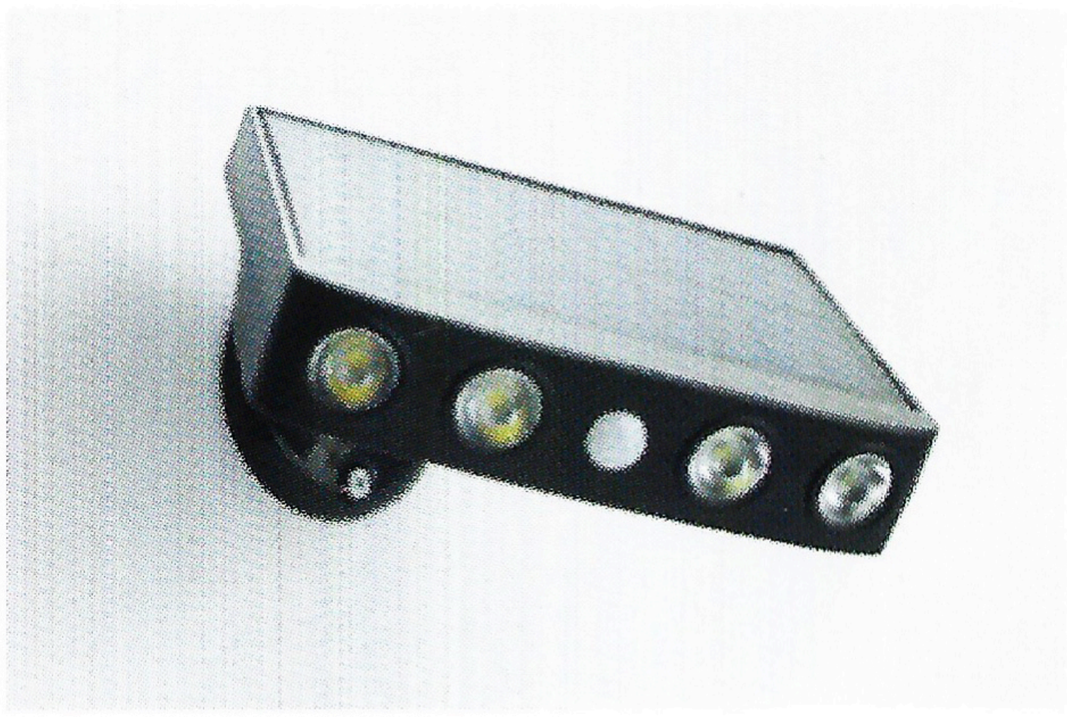

7.安装完成

注意事项

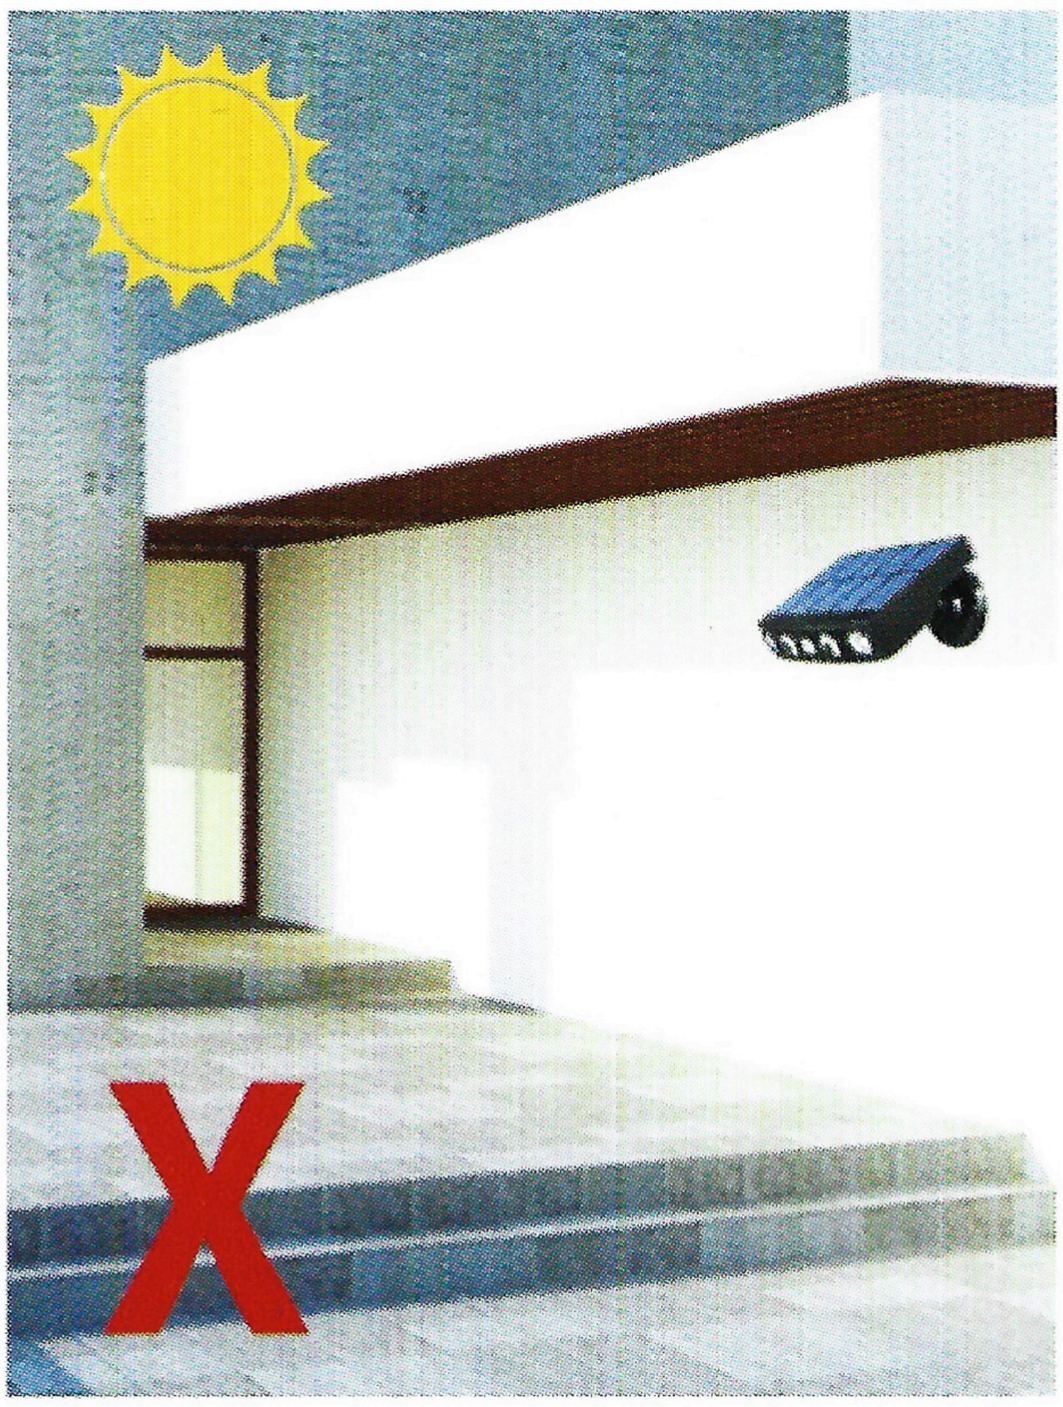

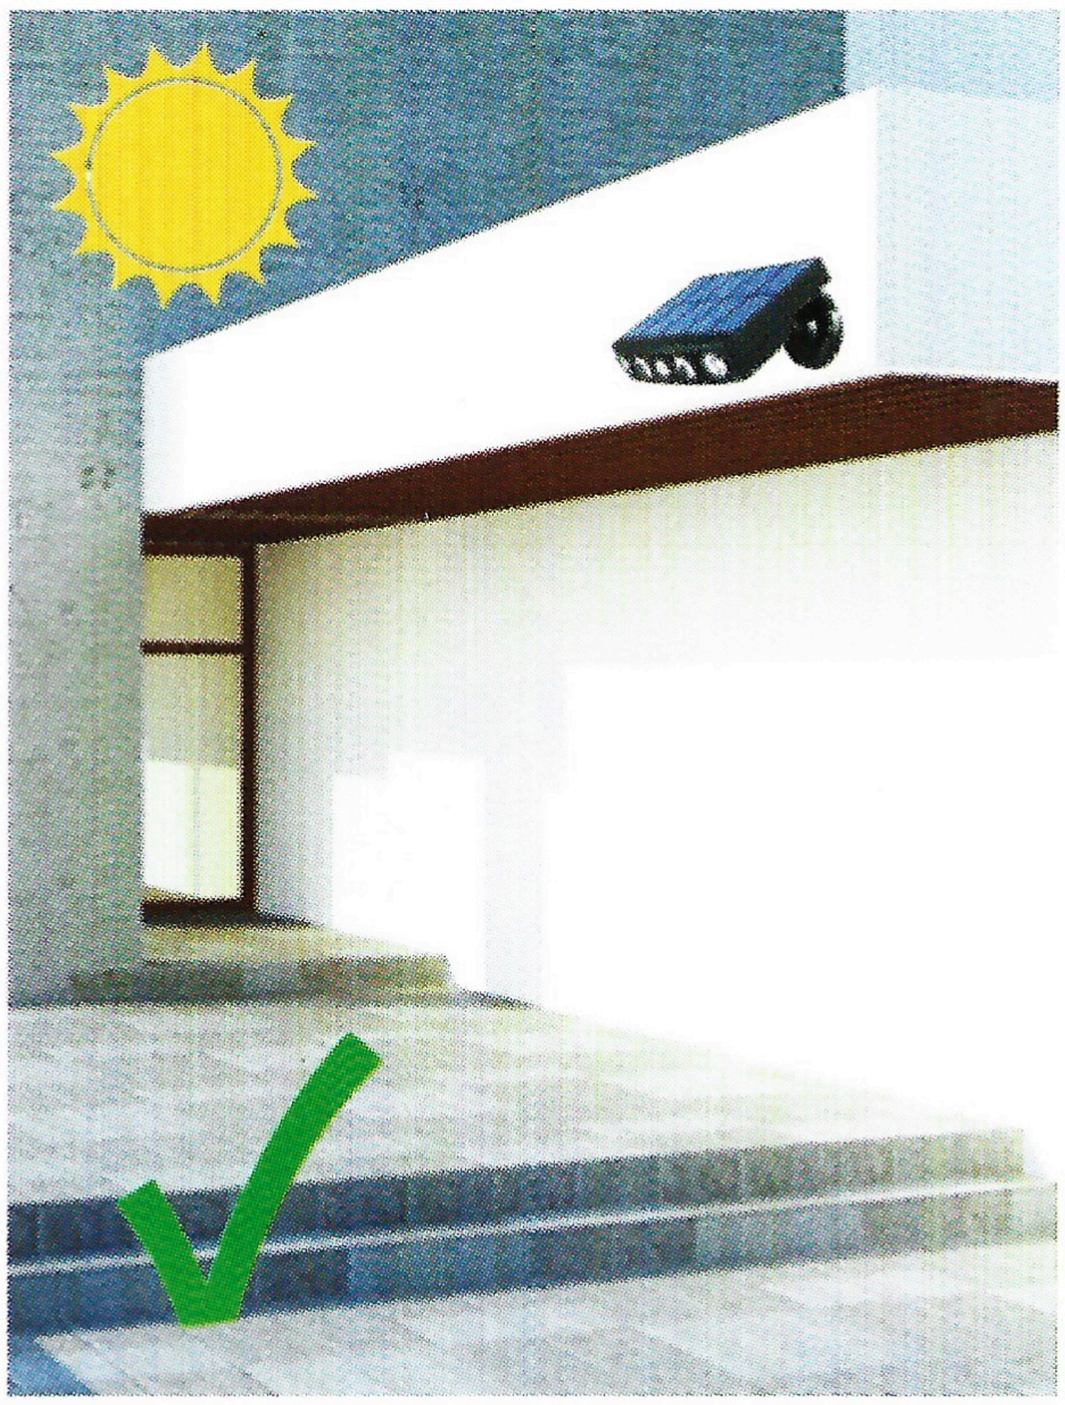

白天避免太阳能面板上有遮挡物挡住太阳光，否则会影响太阳能板发电效率，导致亮灯时间缩短

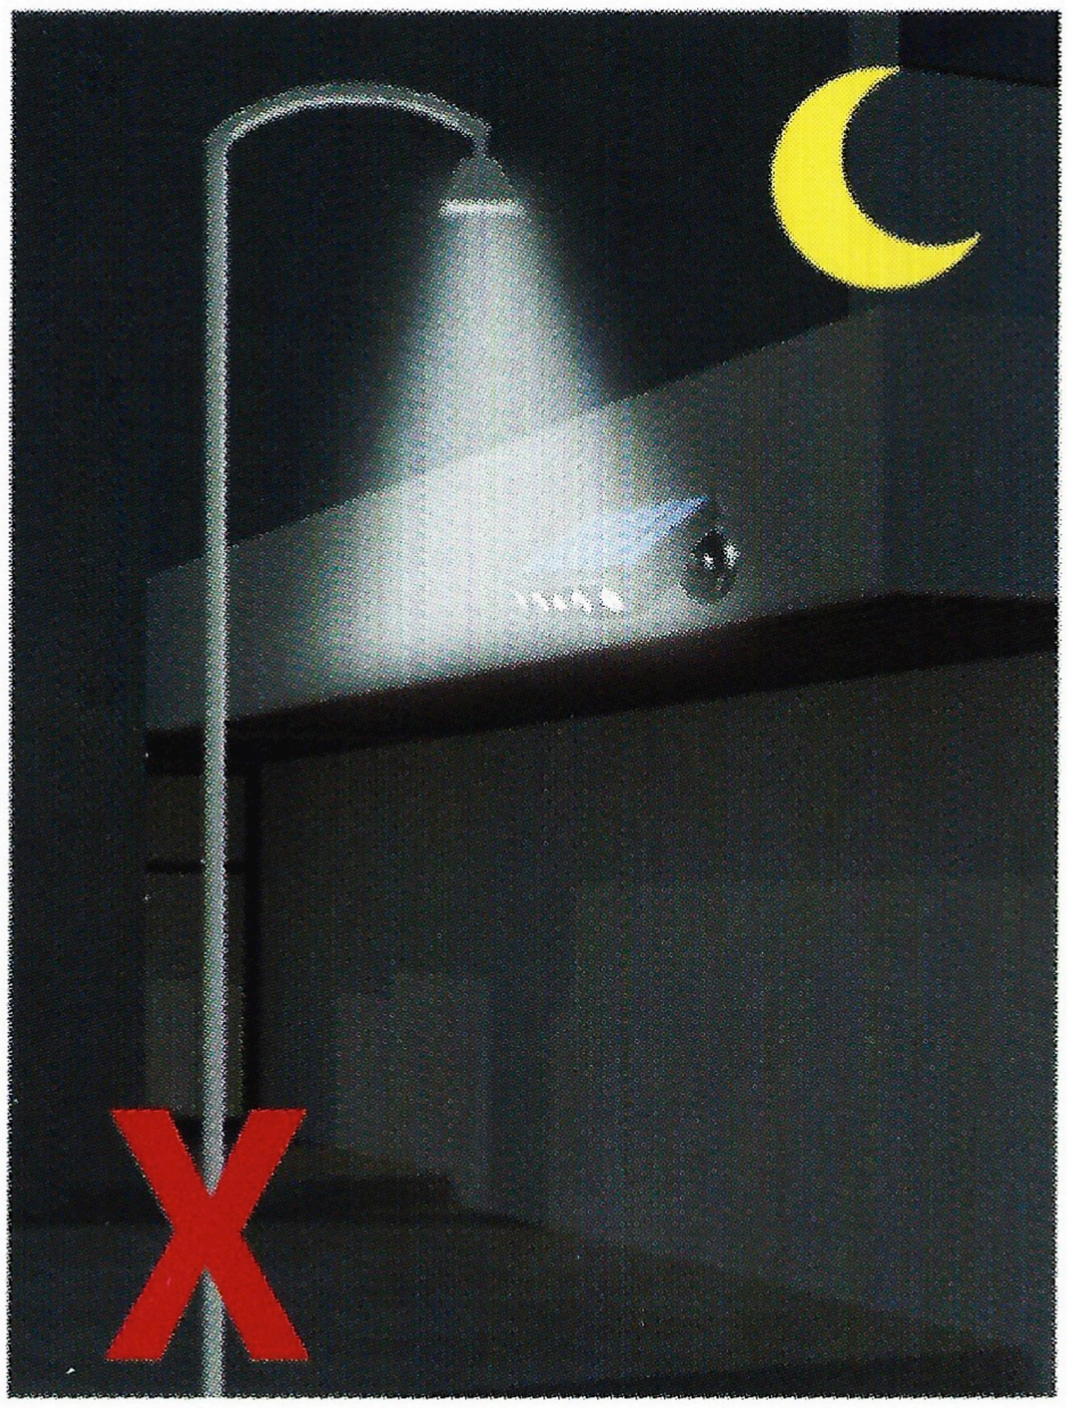

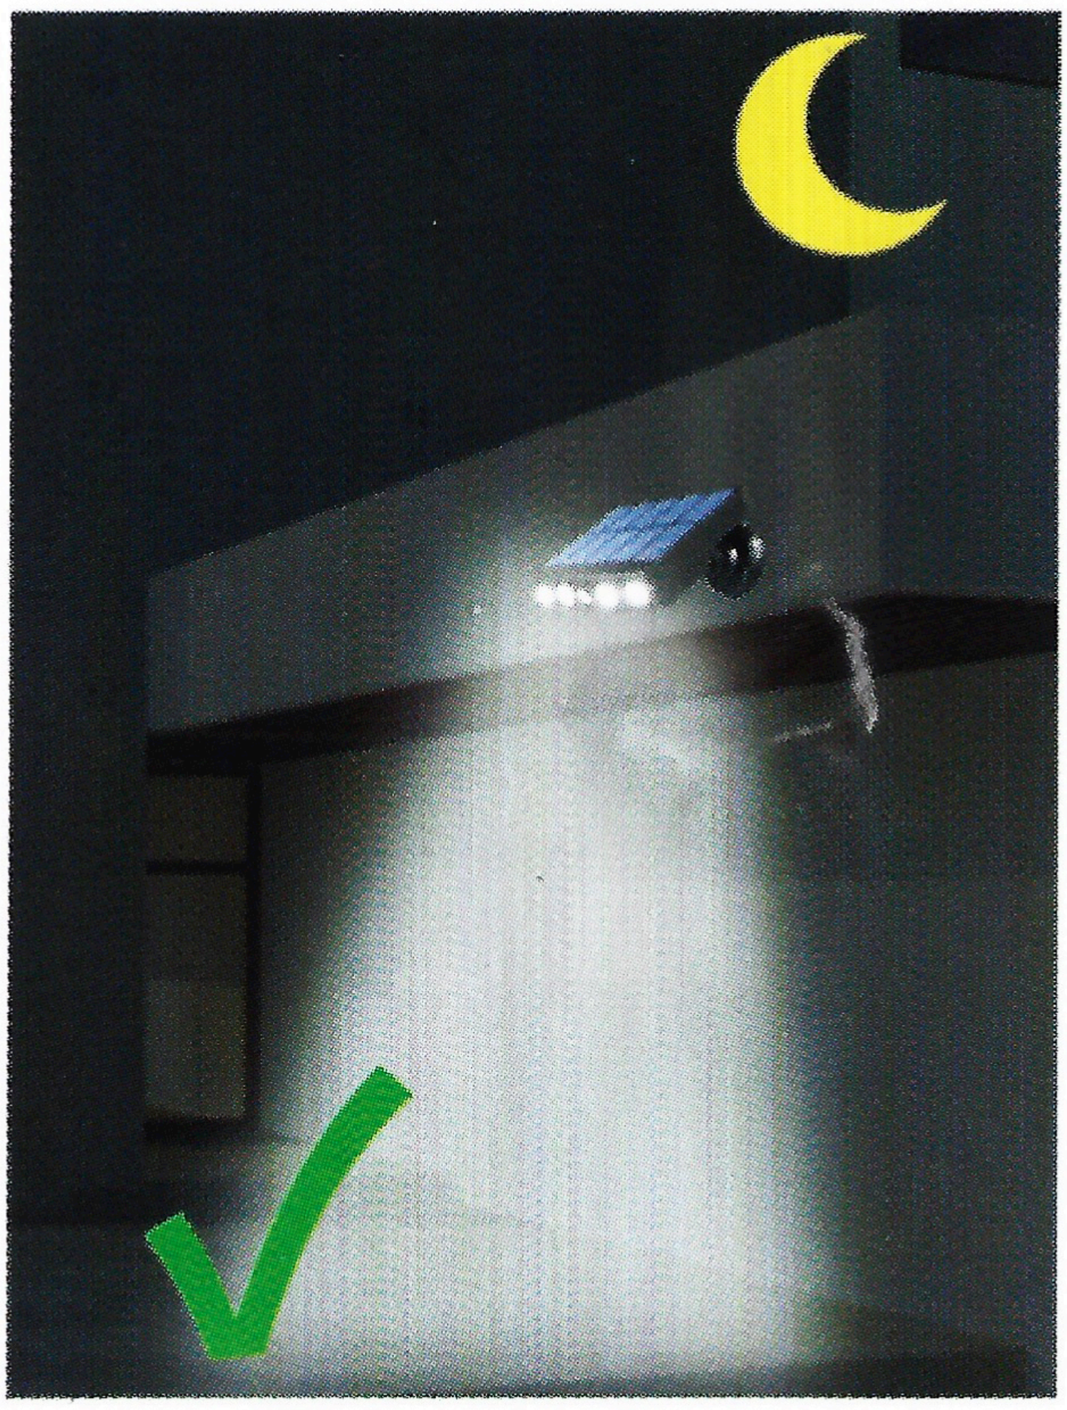

天黑后避免有强光照射在太阳能面板上，否则会自动进入充电状态，导致灯不亮